

### **GENERAL NOTES:**

- 1.SIGN SHALL HAVE A BLUE (D3-1B) BACKGROUND WITH WHITE REFLECTIVE LEGEND AND BORDER. BACKGROUND SHALL BE RETRO-REFLECTIVE SHEETING (TYPE C). REFER TO TXDOT SPECIFICATION DMS-8300 FOR ADDITIONAL DETAILS.
- 2.SIGN BLANKS SHALL BE A MINIMUM OF 18" IN LENGTH, 0.125" THICK AND ONE-PIECE SHEET ALUMINUM ALLOY CONFORMING WITH TXDOT SPECIFICATION DMS 9-7110 "ALUMINUM SIGNS (TYPE A)."
- 3.ALL STREET NAME SIGNS SHALL BE IN CONFORMANCE WITH THE CITY OF KYLE STANDARDS AND INCLUDE THE CITY OF KYLE LOGO.

## POST MOUNTED SIGNS:

- 1.POST-MOUNTED SIGN BLANKS SHALL BE AT LEAST 9" IN HEIGHT BY VARIABLE LENGTH.
- 2.SUPPLEMENTAL LETTERING TO INDICATE THE DIRECTION OF THE STREET (SUCH AS "S", "N") MAY BE IN SMALLER LETTERING AT LEAST 3" TALL FOR POST MOUNTED SIGNS. ABBREVIATIONS (SUCH AS St, Ln, Ave, Rd) AS NOTED IN APPROVED PLANS MAY BE USED.
- 3.POST MOUNTED SIGNS SHALL BE MOUNTED ON A 2 3/8" ROUND GALVANIZED POLE WITH 2 3/8" ROUND POST CAP OR 90° CROSS PIECE AS APPROPRIATE.
- 4.POST MOUNTED SIGNS SHALL BE INSTALLED WITH A "WEDGE ANCHOR STEEL SYSTEM" PER TXDOT SPECIFICATION SMD (TWT) 08.
- 5.FOR POST MOUNTED SIGNS, ALL FONT SHALL BE CLEARVIEW HWY 3W FONT STYLE. REFER TO STANDARD HIGHWAY SIGN DESIGNS (SHSD) FOR TEXAS FOR DETAILS.



D3-1 Street Name Sign

Post Mounted Street Name Sign PROJECT: \_\_\_\_\_\_
DRAWN: \_\_CITY OF KYLE \_\_\_\_\_
DATE: \_\_\_\_\_



### **GENERAL NOTES:**

- 1.SIGN SHALL HAVE A BLUE (D3-1B) BACKGROUND WITH WHITE REFLECTIVE LEGEND AND BORDER. BACKGROUND SHALL BE RETRO-REFLECTIVE SHEETING (TYPE C). REFER TO TXDOT SPECIFICATION DMS-8300 FOR ADDITIONAL DETAILS.
- 2.SIGN BLANKS SHALL BE A MINIMUM OF 18" IN LENGTH, 0.125" THICK AND ONE-PIECE SHEET ALUMINUM ALLOY CONFORMING WITH TXDOT SPECIFICATION DMS 9-7110 "ALUMINUM SIGNS (TYPE A)."
- 3.ALL STREET NAME SIGNS SHALL BE IN CONFORMANCE WITH THE CITY OF KYLE STANDARDS AND INCLUDE THE CITY OF KYLE LOGO.


#### **OVERHEAD MOUNTED SIGNS:**

- 1.OVERHEAD STREET NAME SIGNS ARE FOR SIGNALIZED INTERSECTIONS MOUNTED ON MAST ARMS OR SPAN WIRE.
- 2.OVERHEAD MOUNTED SIGN BLANKS SHALL BE AT LEAST 18" IN HEIGHT WITH VARIABLE LENGTH.
- 3.SUPPLEMENTAL LETTERING TO INDICATE THE DIRECTION OF THE STREET (SUCH AS "S", "N") MAY BE IN SMALLER LETTERING AT LEAST 6" TALL FOR OVERHEAD MOUNTED SIGNS. ABBREVIATIONS (SUCH AS St, Ln, Ave, Rd) AS NOTED IN APPROVED PLANS MAY BE USED.
- 4.FOR OVERHEAD SIGNAL MAST ARM MOUNTED SIGNS, ALL FONT SHALL BE CLEARVIEW HWY 5W FONT STYLE (WITH SPECIAL EXCEPTIONS IF THERE ARE SPACE LIMITATIONS). REFER TO SHSD FOR TEXAS FOR DETAILS.



D3-1 Street Name Sign

Overhead Mounted Street Name Sign PROJECT: \_\_\_\_\_\_\_
DRAWN: \_\_CITY OF KYLE \_\_\_\_\_
DATE: \_\_\_\_\_

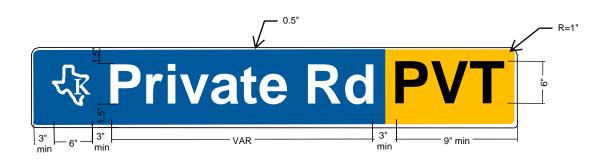

# PRIVATE ROAD SIGN TAB (POST MOUNTED):

D3-1 Street Name Sign

- 1.PRIVATE ROAD SIGN TAB SHALL HAVE A YELLOW BACKGROUND WITH BLACK REFLECTIVE LEGEND AND BORDER. BACKGROUND SHALL BE RETRO-REFLECTIVE SHEETING (TYPE C). REFER TO TXDOT SPECIFICATION DMS-8300 FOR ADDITIONAL DETAILS.
- 2.PVT SIGN TAB SHALL BE PART OF THE STREET NAME SIGN BLANK PER THE COLOR AND LEGEND SPECIFICATIONS ABOVE.
- 3.PRIVATE ROAD SIGN TABS SHALL NOT BE INSTALLED WITHOUT PRIOR APPROVAL FROM THE CITY.
- 4.FOR PRIVATE ROAD SIGN TAB, ALL FONT SHALL BE CLEARVIEW HWY 3B FONT STYLE (WITH SPECIAL EXCEPTIONS IF THERE ARE SPACE LIMITATIONS). REFER TO SHSD FOR TEXAS FOR DETAILS.



Private Road Sign Tab